


WARNING!!
 DO NOT CUT OR DAMAGE
 HEATIZON "ZMESH" OR
 FASTEN THRU ANY OTHER
 ELECTRICALLY CONDUCTIVE
 MATERIAL AND "ZMESH"
 SIMULTANEOUSLY.

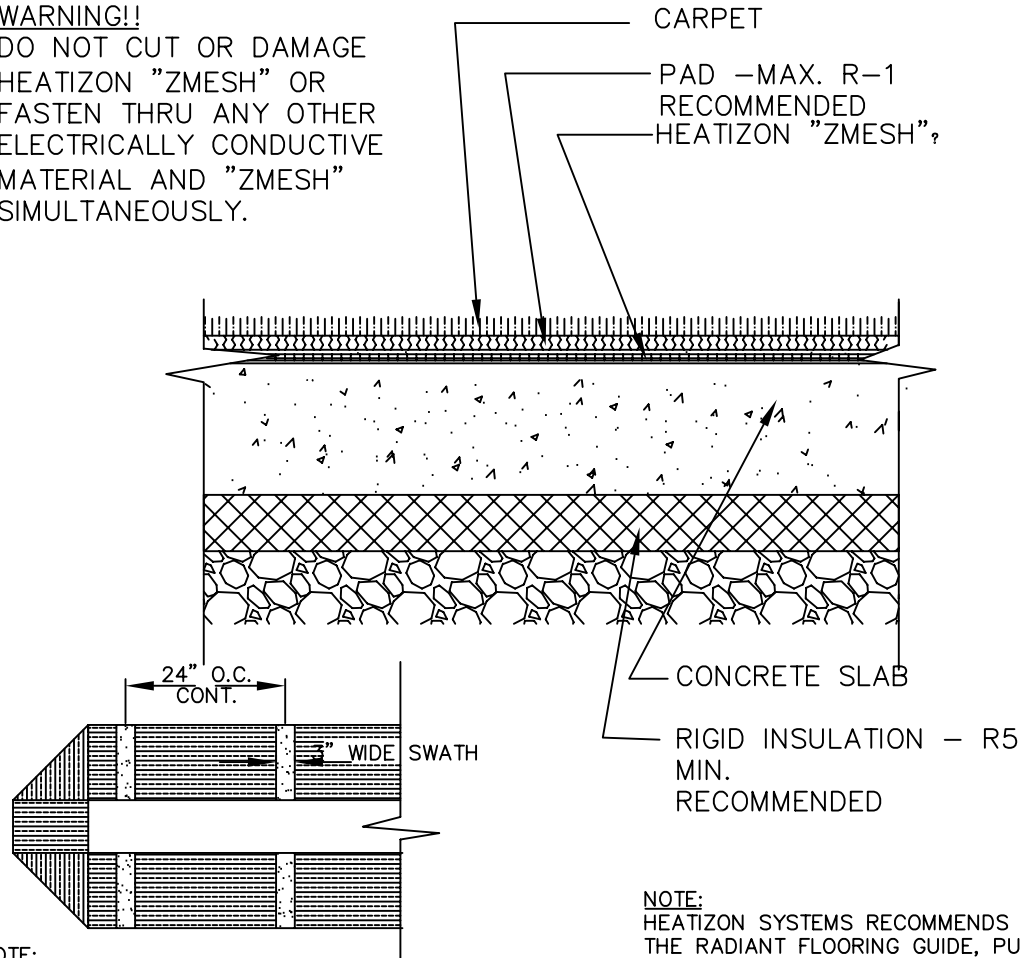

NOTE:
 IF INSTALLATION OF "ZMESH" IS ON CONCRETE, USE A FLOORING ADHESIVE TO HOLD THE "ZMESH" IN PLACE. PLACE 3" WIDE SWATHS OF ADHESIVE ACROSS THE "ZMESH" AT 24" O.C..
 DUCT TAPE IS HELPFUL IN HOLDING THE "ZMESH" IN PLACE UNTIL ADHESIVE DRIES. FOLLOW DIRECTIONS OF FLOORING ADHESIVE MANUFACTURER FOR APPLICATION OF FLOOR ADHESIVE.

NOTE:
 HEATIZON SYSTEMS RECOMMENDS THAT THE RADIANT FLOORING GUIDE, PUBLISHED BY THE RADIANT PANEL ASSOCIATION BE CONSULTED PRIOR TO SELECTING FLOOR COVERINGS. IN ADDITION, ALWAYS CONSULT YOUR FLOOR COVERING SUPPLIER ABOUT THE SUITABILITY OF YOUR FLOOR COVERINGS FOR INSTALLATION OVER IN-FLOOR RADIANT HEATING PRODUCTS.

DRAWING NO.:

FH-8B

**ZMESH ON CONCRETE
 UNDER CARPET & PAD**

DRAWING NO.:

JNL

DATE:

JAN. 2003

HEATIZON SYSTEMS

advanced floor heating/snowand ice removal systems

4137 SOUTH 500 WEST, MURRAY, UTAH 84123 PH (801) 293-1232 FAX (801) 293-3077